


1. THE BOTTOM OF THE EFFLUENT DISPOSAL SYSTEM SHALL BE CONSTRUCTED AT ELEVATION 47.0 WHICH IS APPROXIMATELY 4.0' BELOW ORIGINAL GROUND ON THE HIGH CONTOUR THE DESIGNED EDS.


 EXISTING CONTOUR  
 PROPOSED CONTOUR  
 EXISTING SPOT ELEVATION  
 PROPOSED SPOT ELEVATION

1. THIS PLAN IS NOT TO BE CONSTRUED AS A  
BOUNDARY SURVEY. PROPERTY LINES SHOWN  
ARE APPROXIMATED BASED ON INFORMATION  
FROM THE FOLLOWING SOURCE:  
RCRD PLAN 13506

---


2. NHDES-WS&PCD SUBDIVISION APPROVAL  
NUMBER: 19734

---

3. THIS SYSTEM IS NOT DESIGNED TO HANDLE  
GARBAGE DISPOSAL, JACUZZI BATH, OR SEWAGE  
EJECTOR PUMP WASTE.  
BACKWASH FROM WATER SOFTENERS SYSTEMS SHOULD  
BE DISCHARGED TO A SEPARATE DRYWELL.

4. a) NO SURFACE WATER WITHIN 100'  
b) NO WELLS WITHIN 100' OF PROPOSED  
c) NO HYDRIC B SOILS WITHIN 100' PROPOSED  
d) NO HYDRIC A SOILS WITHIN 100' SYSTEM

5. DESIGNER MUST BE CONSULTED FOR ANY PROPOSED  
CHANGES OR ERRORS/DISCREPANCIES FOUND DURING  
SYSTEM INSTALLATION. (603 929-7404)  
INSTALLER IS RESPONSIBLE FOR ANY TOWN PERMITS OR  
INSPECTIONS REQUIRED FOR THIS INSTALLATION.

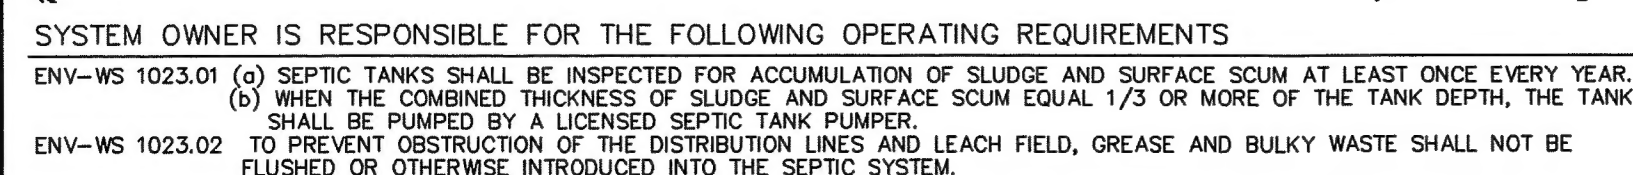

ENV-WS 1023.03	TOXIC AND HAZARDOUS MATERIALS SHALL NOT BE FLUSHED OR OTHERWISE INTRODUCED INTO THE SEPTIC SYSTEM.
ENV-WS 1023.04	TO PREVENT DAMAGE TO THE DISTRIBUTION LINES AND LEACH FIELD, VEHICLES, LIVESTOCK, AND OTHER HEAVY OBJECTS SHALL NOT BE ALLOWED ON THE LEACH FIELD.
ENV-WS 1023.05	IF WET AREAS APPEAR ON THE GROUND SURFACE ABOVE THE DISTRIBUTION LINES OR LEACH FIELD OR IF DISAGREEABLE ODORS OCCUR, THE SYSTEM SHALL BE INSPECTED FOR THE SOURCE OF THESE PROBLEMS, AND CORRECTIVE ACTION SHALL BE TAKEN.

AREA PROPOSED: 25' X 50' = 1250 SF PROVIDED

## STRATHAM, NH 03885

APPROVAL: CA2008094041